



Samsung Galaxy Ace Teardown

Samsung Galaxy Ace S5830 GENERAL 2G Network GSM 850 / 900 / 1800 / 1900 3G Network HSDPA 900 / 2100 HSDPA 850 / 1900 - Samsung Galaxy Ace S5830L SIM Standard Announced 2011, January Status Available. Released 2011, February BODY

Written By: AndreaBaglione





TOOLS:


- [iSesamo Opening Tool](#) (1)
 - [Heat Gun](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Samsung Galaxy Ace Teardown




- Rotate your Phone.
- Remove the plastic battery door.
- Remove battery.
- Unscrew all 7 screws so that the cover can be removed.

Step 2

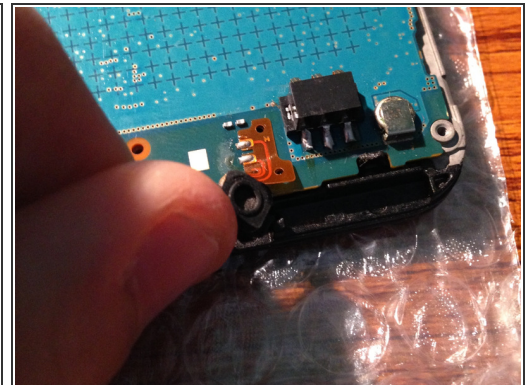


- With a plastic tool separate the frame from the aluminum plate. (either from the inside or outside)
- Make sure your Micro SD card is removed from the device Micro SD card slot.
- Disconnect the microphone using your fingers, be careful not to do too much pressure.

Step 3

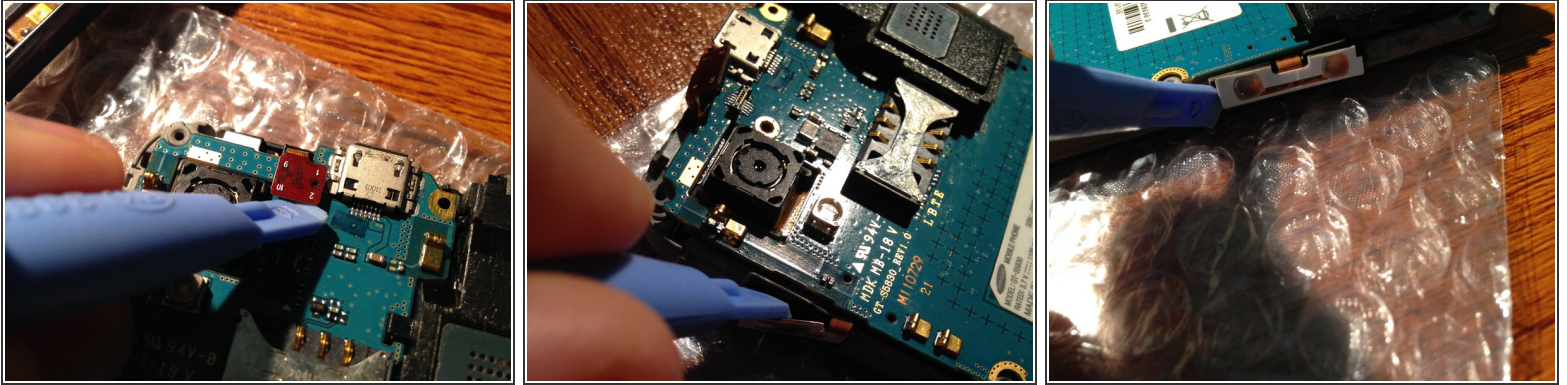



- Disconnect the light sensor and ear piece speaker. To remove this use a plastic tool.
- Disconnect the volume rocker, be very careful! They are very thin and glued with double-sided tape. If possible, use isesamo or something really thin!

Step 4

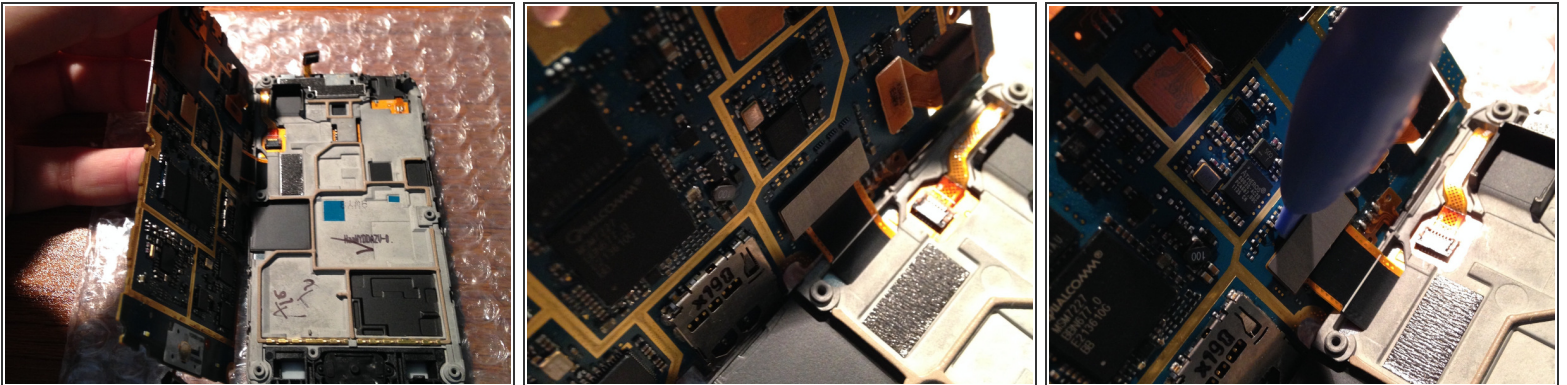




- Lift the logic board from the right side, be careful not cause any damage to gently rotate the LCD connector.
- Now with a plastic tool you can disconnect the LCD connector.

Step 5

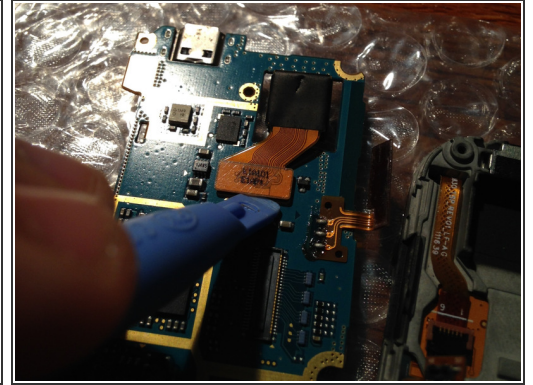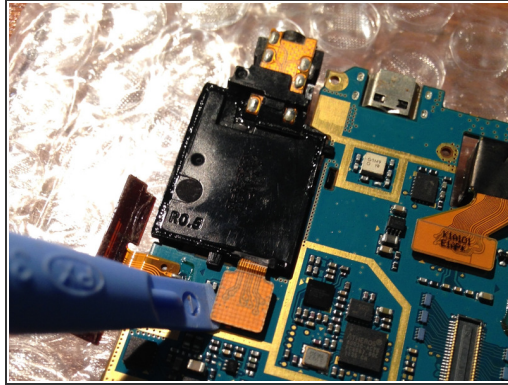

- Remove logic board
- Disconnect speaker and camera with a plastic tool.

Step 6

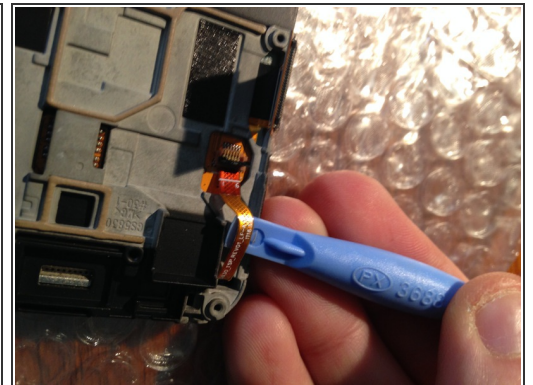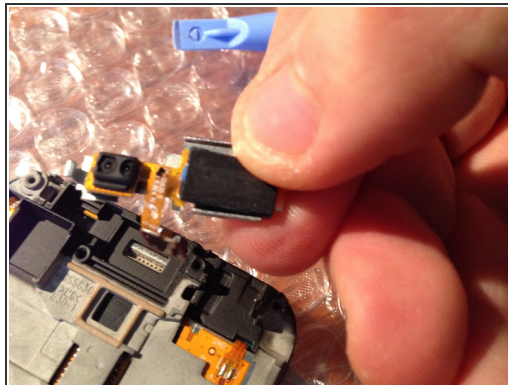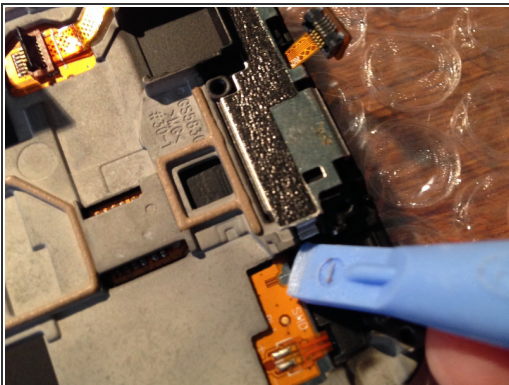

- Use a plastic tool or something sharp to lift the aluminum protection that serves to fix earpiece speaker and light sensor and remove it.
- After lifting the connector of the touch screen (black tab), lift the cable carefully!

Step 7



- Press the home button to remove it. (This is not fixed, no material).
- Heat the glass lens with a hot air gun, a tool insert after "isesamo" and slowly raise it.
- Remove it.

Step 8



- Disassembly is finished! To assemble, follow the guide from the end point to the initial.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 01:55:21 AM.